


C-22 Casing Heads

Features

- Straight Bowl with 45 Degree Load Shoulder
- Compatible with C-21 and C-22 Casing Hangers
- Studded or Line Pipe Outlets
- SOW Bottom Prep with Test Seal
- Manufactured in accordance with API 6A PSL 2
- No Weld Detachable Base Plate Available

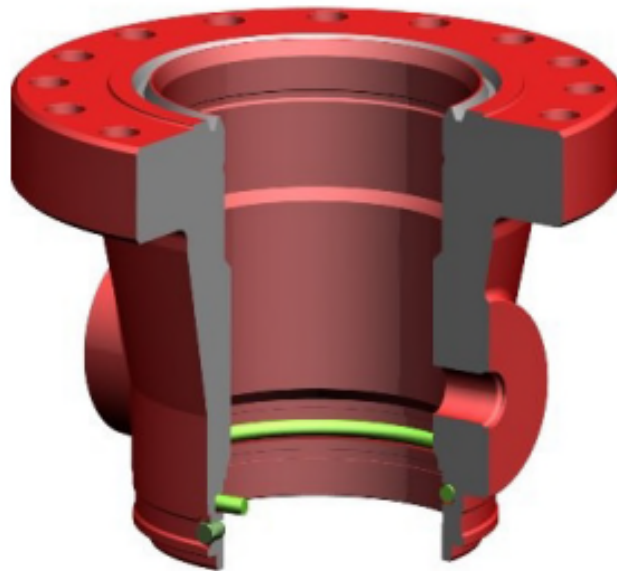

Top Flange	Bottom Prep	Outlet	Bowl Diameter	Bowl Depth	Minimum Bore	PSL
11-5K	9 5/8 SOW	2 LPO	10.880	6.52	9.005	2
11-5K	9 5/8 SOW	3 LPO	10.880	6.52	9.005	2
11-5K	9 5/8 SOW	2 1/16-5K STD	10.880	6.52	9.005	2
11-5K	10 3/4 SOW	2 LPO	10.880	6.52	10.005	2
11-5K	10 3/4 SOW	2 1/16-5K STD	10.880	6.52	10.005	2
13 5/8-3K	11 3/4 SOW	2 LPO	13.505	6.52	11.005	2
13 5/8-3K	13 3/8 SOW	2 LPO	13.505	6.52	12.505	2
13 5/8-5K	13 3/8 SOW	2 LPO	13.505	6.52	12.505	2
13 5/8-5K	13 3/8 SOW	2 1/16-5K STD	13.505	6.52	12.505	2