

iComplete™

Get to first oil faster, safer and smarter with iComplete™. Our integrated system enables you to frac differently by leveraging flexible pipe, automation and digital efficiency to minimize complexity and eliminate intervention in the red zone.

Our fully integrated iComplete™ system gets to first oil faster by doing things differently. We leverage flexible pipe, automation and advanced digital capabilities to deliver greater efficiency with 80 percent fewer connections. This means an elimination of human intervention in the red zone, making your frac pad faster, safer and smarter. iComplete™ offers more service capability, greater reliability and fewer emissions with the simplicity of one pad, one supplier and one invoice. From pump to casing, iComplete™ minimizes complexities so you can focus on one thing: Getting to first oil faster with 30 percent lower costs.

System integration

- ▶ Operational efficiency
- ▶ Compatibility
- ▶ Lower costs
- ▶ Less NPT

Next level HSE

- ▶ Safer
- ▶ Easier rig up
- ▶ Reduced risk
- ▶ Fewer emissions

Technology


- ▶ Flexible pipe
- ▶ Fatigue resistant connections
- ▶ Remote wireline operation
- ▶ Proprietary erosion resistant materials


Digital automation

- ▶ Data capture
- ▶ Positive predictability
- ▶ Remote operations
- ▶ Eliminate red zone intervention

80% fewer connections + 50% fewer components

> 50% faster rig up + 30% lower costs

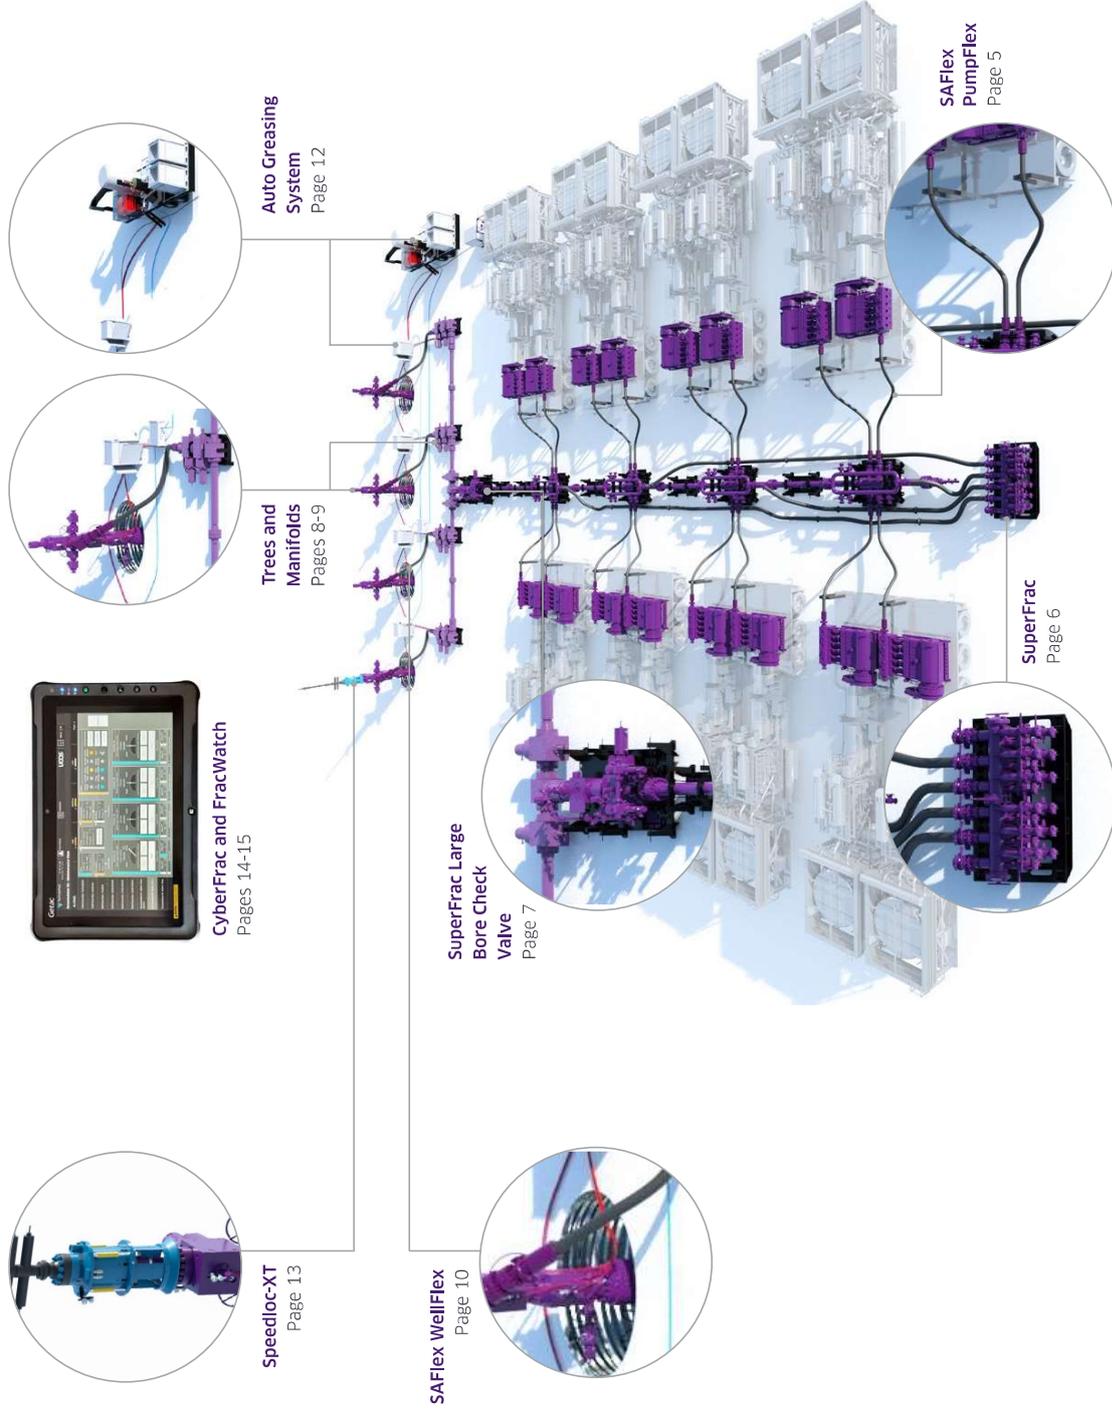

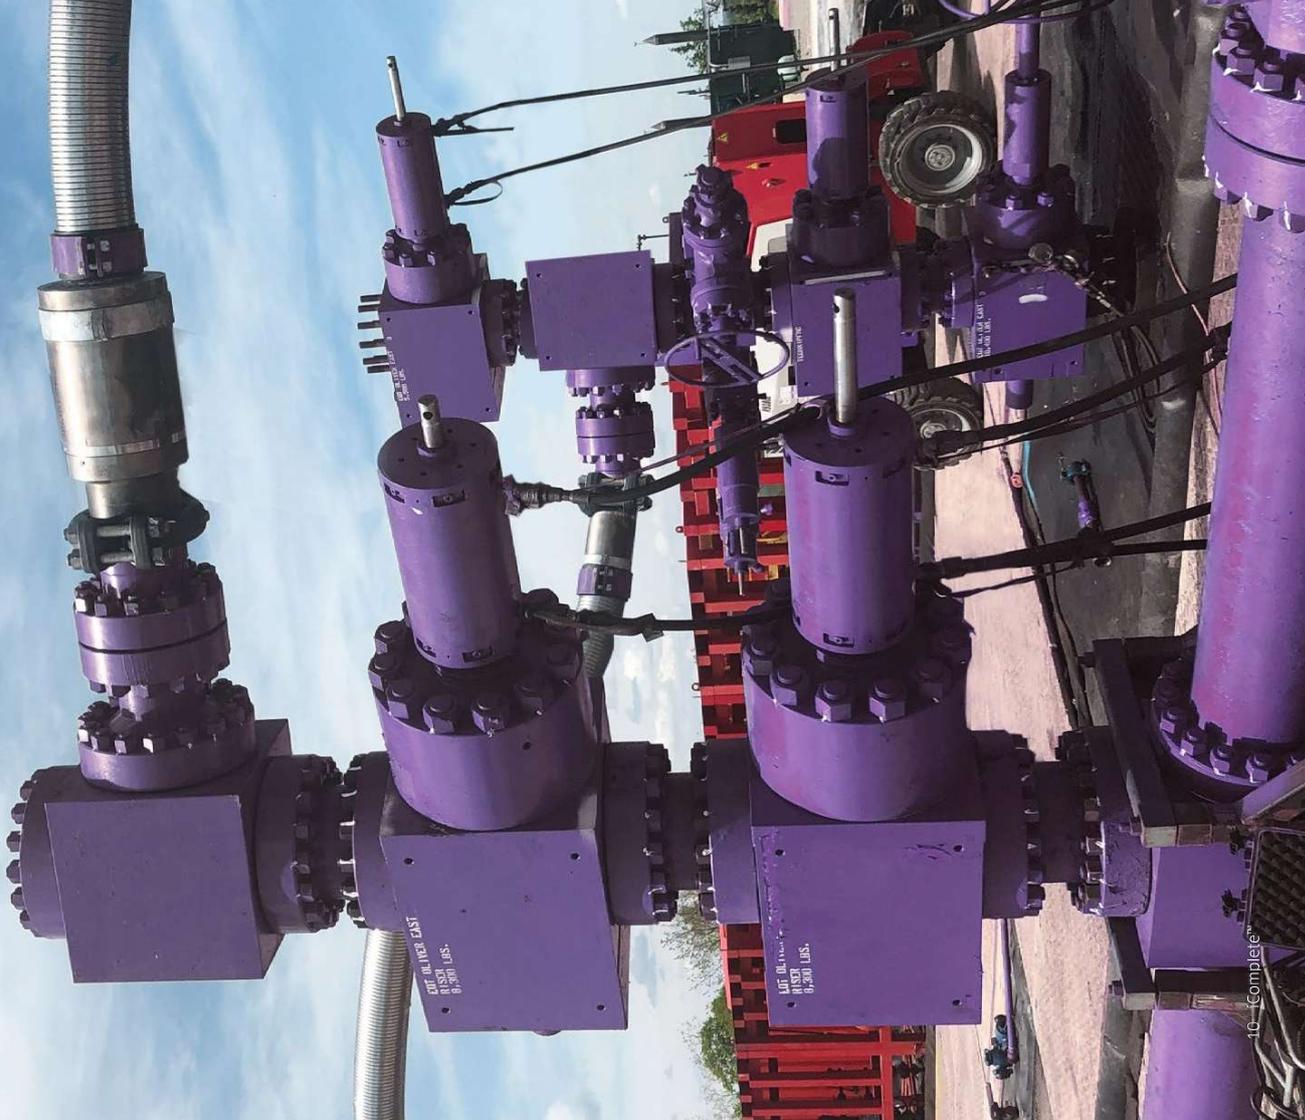

SAFlex™ - WellFlex™

80% fewer connections, leading to 50% faster rig up and eliminating iron management

WellFlex™ is the mid-to-large bore sizes of our iComplete™ SAFlex™ onshore flexibles portfolio. WellFlex™ flowlines deliver higher flow rates, improving slurry delivery and reducing operational costs and downtime.

WellFlex™ enhances completion project economics with two simple connections, eliminating several iron connections between the manifolds and trees. With industry standard clamp connections, WellFlex™ offers flexibility in rig ups and significantly reduces rig-up time.

System features

4-inch, 5-inch and 5.5-inch 15,000 psi, robust end fitting with proprietary sealing technology, armor sheathing, visual inspection for wear, market leader in weight per foot



SAFlex™ Portfolio	4" WellFlex	5" WellFlex	5.5" WellFlex
Length	24 ft	25 ft	25 ft
Flowrate (max)	60 bpm	110 bpm	135 bpm
End Connections	4In-15K FLC	Clamp (5-Hub)	Clamp (5.5-Hub)
MBR (in service)	3.5 ft	4.5 ft	4.5 ft
Pressure - Design	15.0 ksi	15.0 ksi	15.0 ksi
Weight (empty)	58.3 lbs/ft	67.3 lbs/ft	72.0 lbs/ft



Durable

- ▶ Erosion and corrosion resistant liners
- ▶ High flow rate flexibles that lock in place while pressurized
- ▶ Dissipation of pump cavitation and system vibration



Faster

- ▶ Faster rig up by reducing connections and multiple lifts
- ▶ Hammer union removal
- ▶ Improved flow rates



Flexible

- ▶ Improves missile and zipper placement
- ▶ Facilitates proper connection makeup
- ▶ Removes fatigue