

## POWER SECTION



FIT INFORMATION - MINOR DIAMETER (in)				
Stator Size	NBR-1A	DynaPower		
		XR	HR	XP
1 Undersize			3.979	3.979*
Standard	3.986		3.986	3.986*
1 Oversize	4.003		4.001	4.001*
2 Oversize				
Nominal Fit at 75°F				
1 Undersize			0.011	0.011*
Standard	0.004		0.004	0.004*
1 Oversize	-0.013		-0.011	-0.011*
2 Oversize				

ROTOR SPECIFICATIONS		STATOR SPECIFICATIONS	
	(in)		(in)
Overall Length	238.5	Overall Length	245.0
Contour Length	231.5	Rubber Cutback #1**	8.0
Eccentricity	0.255	Rubber Cutback #2**	8.0
Major Diameter	4.500	Tube O.D.	6.75
Head Diameter	4.000	Tube I.D.	5.50
Weight (lb)	803	Weight (lb)	909
Material	17-4SS	Number of Stages	3.3
Thread Form**	2 7/8 API REG		

\*Pending production measurements

\*\* Alternate or custom thread forms and cutbacks are available upon request

PERFORMANCE SPECIFICATIONS						
			NBR-1A	XR	HR	XP
Torque Slope	19,000 ft-lb/psi	Max. Diff. Press. (psi)	500		740	830
Flow Range	300 to 600 GPM	Max. Torque (ft-lb)	9410		14110	15680
RPG	0.140 rev/gal	Stall Diff. Press. (psi)	740		1110	1240
Speed Range	42 to 84 RPM	Stall Torque (ft-lb)	14110		21160	23510
Off Bottom Press.	150 psi	Max. Recommended (HP)	126		190	211
		PSI Per Stage	150		225	250
		PSI Per Cavity	26		38	43
		Temperature Slope (in/°F)	0.000342		0.000269	0.000269

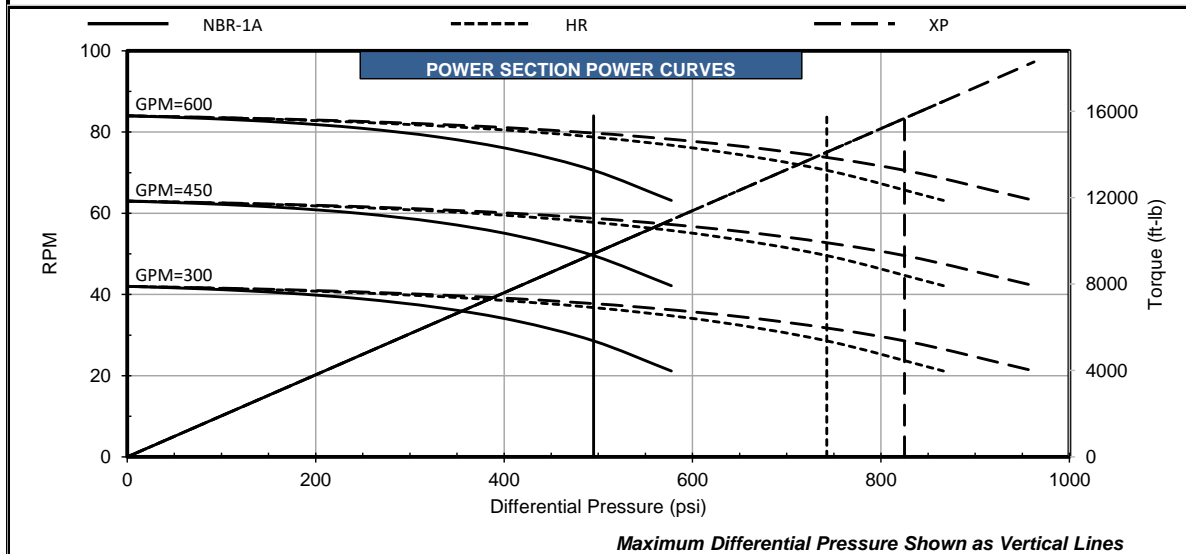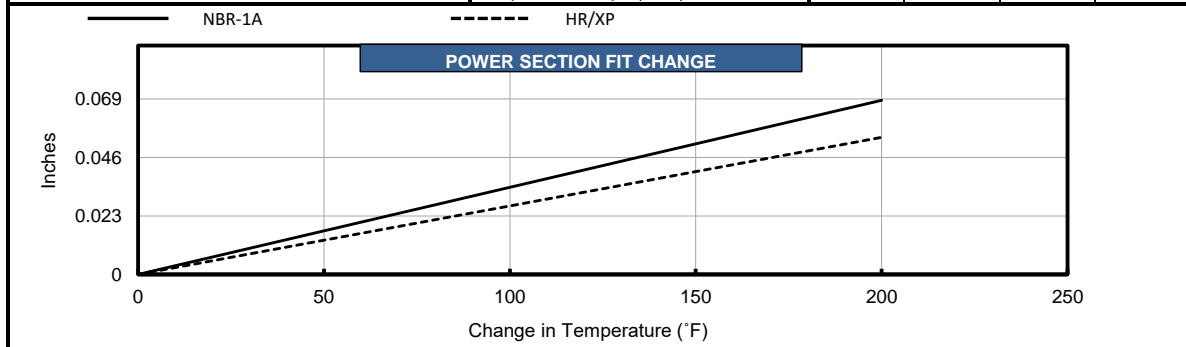

Operating a power section above the maximum recommended differential pressure will reduce stator life. Performance curves are for reference only. Actual power section performance may vary depending on the down hole temperature and rotor/stator fit. Performance data are subject to change without notice. Power calculation is based on maximum RPM and full torque. Stator sizes subject to change without notice.