

IC Conventional Wellhead System


The versatile IC* conventional wellhead system product line incorporates a wide range of slip-type and mandrel casing hangers and packoffs, including the automatic slip-type hanger, which uses casing weight to energize the annular seal. Rated to 10,000 psi, the IC wellhead system can thus be configured to meet many service conditions. It incorporates the lower casing head housing and hanger as well as the subsequent casing head spools and hangers. It is compatible with all our tubing spool and hanger configurations.

Applications

- Offshore and onshore drilling and production

Advantages

- Straight-bore design with a 45° load shoulder
- Working pressure up to 10,000 psi [68.9 MPa] (excluding tubing stool)
- Operating temperatures from -20 to 150 degF [-29 to 65 degC]
- Hangoff capacity up to 50% of pipe body yield
- Casing head housings and spools: IC-2, IC-2-BP, and IC-2-L
- Casing hangers: IC-1, IC-1P, and IC-2 slip and seal assemblies
- Optional secondary seals and packoff bushings
- Interchangeability
- Compatibility with many configurations

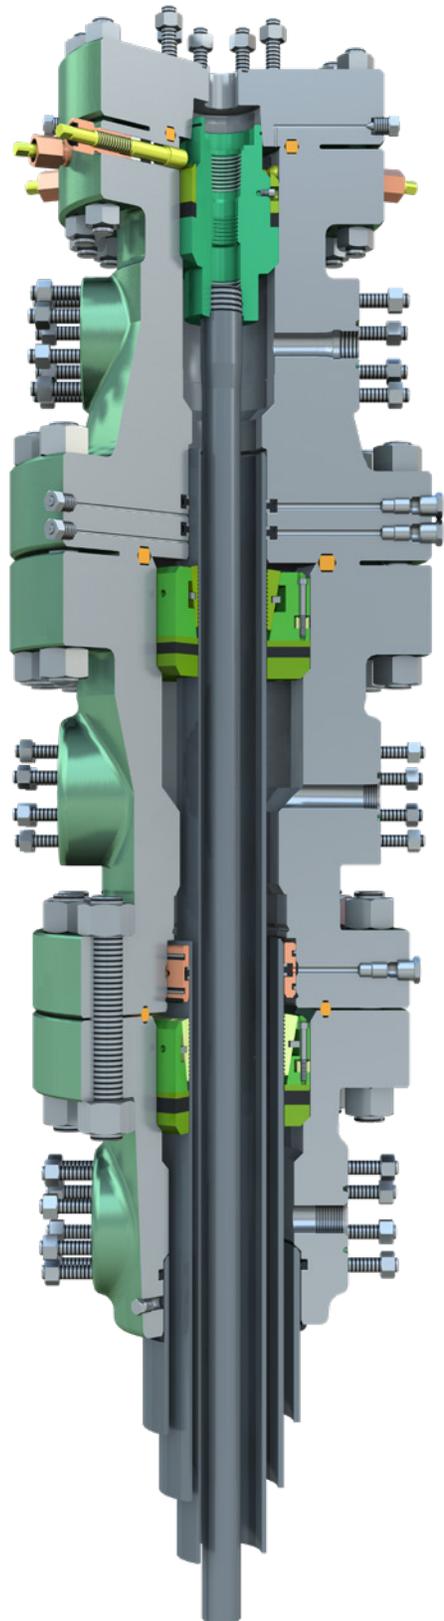

The IC wellhead system uses a straight-bore design with a 45° load shoulder.