

## Multi-Action Top Sub (MAT Sub)

**The Multi-Action Top Sub (MAT Sub) is designed for use in conjunction with GS Pulling/Running Tools.**

Once fitted to the GS tools the MAT Sub provides multiple pinning options to vary the 'shear to release' mode of the tool. A built-in safe re-arming tool simplifies re-pinning and can be used for routine wireline intervention operations as well as special applications.

### APPLICATIONS

- Recovery of downhole flow devices
- Reduces miss-runs
- Fishing applications where a 'jar up to release' option is required
- Setting of downhole items where a 'jar down to release' option is required


### FEATURES AND BENEFITS

- Simple to retrofit
- Three running mode options
  - 'Jar down to shear'
  - 'Jar up to shear'
  - 'Jar up' followed by 'jar down to shear'
- Built in, re-arming tool
- Simple to redress
- Built to suit standard industry ODs
- Robust design
- Inventory reduction

### TECHNICAL INFORMATION

Nominal Size, in	Actual OD, in	To Engage Fish Neck*, in
2	1.810	1.38
2 1/2	2.250	1.81
3	2.720	2.31
3 1/2	3.110	2.62
4	3.620	3.12
5	4.500	4.00
6	5.560	5.00
7	5.875	5.25

\*When made up to appropriate GS Pulling Tool.

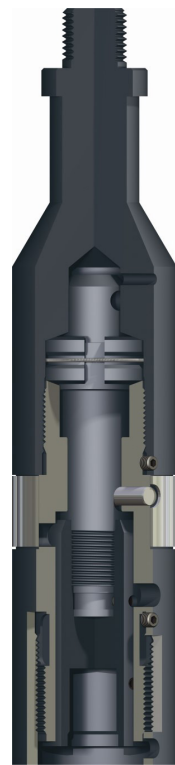

▲ Standard GS Pulling Tool fitted with the Peak Multi-Action Top Sub

**Product Code:** Multi-Action Top Sub (MAT Sub) / 207

info@peakwellsystems.com | peakwellsystems.com

© 2017 Peak Well Systems Pty Ltd. All rights reserved. Revision: 3rd February 2014

**peak**   
WELL SYSTEMS