



Oil Tools


sales@ServaOilTools.com

ServaOilTools.com

+1 (940) 503-4437



R PROFILE NIPPLE BOX X PIN

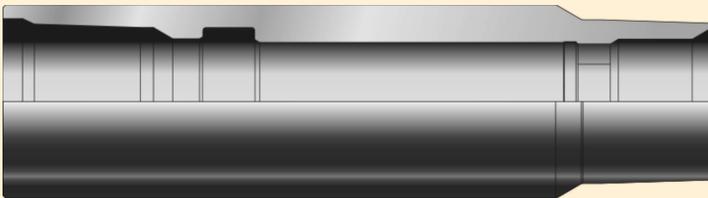

The Model "R" Profile Nipple is a BOTTOM NoGo Nipple that provides for the location of various wireline flow control devices in the production string.

APPLICATIONS

- ▶ Land blanking plugs to shut in well or to test the production tubing.
- ▶ Land Velocity Type Safety Valves.
- ▶ Land equalizing check valves.
- ▶ Land circulating blanking plugs.
- ▶ Land chokes to reduce surface flowing pressures.
- ▶ Land instrument hangers with geophysical devices, such as, pressure and temperature recorders.
- ▶ Restricted I.D. catches tools dropped during wireline work.

One company at the center of the energy revolution is uniquely equipped with the know-how and ingenuity to make possibilities happen—SERVAgroup.com



Oil Tools

sales@ServaOilTools.com

ServaOilTools.com

+1 (940) 503-4437



R PROFILE NIPPLE BOX X PIN



SERVA Specification Guide R Profile Nipple Box X Pin						
Size (in)	OD (in)	Seal Bore (in)	NoGo ID (in)	Pressure (psi)	Connection thread	Part Number
2.375	3.063	1.781	1.728	10,000	2 3/8" EUE	2122178632
2.375	3.063	1.812	1.760	10,000	2 3/8" EUE	2122181632
2.375	3.063	1.875	1.822	10,000	2 3/8" EUE	2122187632
2.875	3.668	2.250	2.197	10,000	2 7/8" EUE	212225632
2.875	3.668	2.312	2.259	10,000	2 7/8" EUE	2122231632
3.500	4.500	2.750	2.697	10,000	3 1/2" EUE	2122275632
3.500	4.500	2.812	2.759	10,000	3 1/2" EUE	2122281632

One company at the center of the energy revolution is uniquely equipped with the know-how and ingenuity to make possibilities happen—[SERVA group.com](http://SERVAgroup.com)