
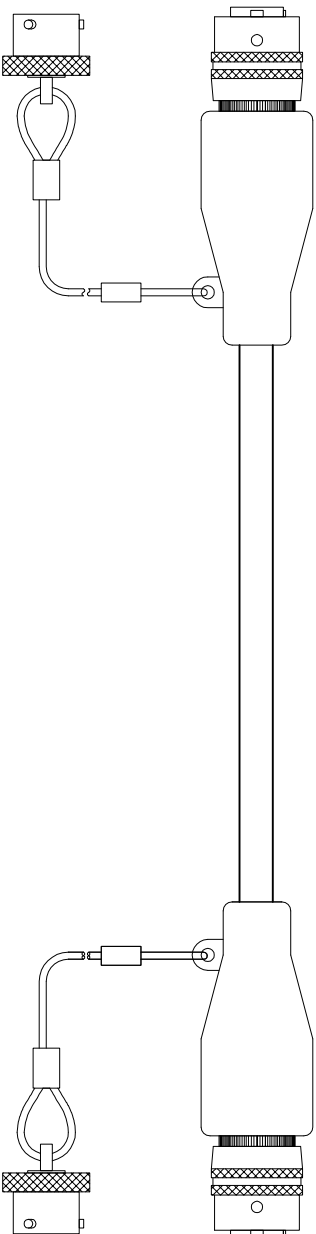



FROM	COLOR	TD	CONNECTORS
J1-A	RED	J2-A	J1 PT06A 10-6
J1-B	GRN	J2-B	J2 PT06A 10-6
J1-C	BLK	J2-C	CAPS: MS3180-10CA
J1-D	WHT	J2-D	
J1-E	SHLD	J2-E	
J1-F	SHLD	J2-F	



Use diagram below to construct model number

100 X - XXXX - XX - XXX

FINISH A=BLACK ANDDIZED B=OLIVE DRAB	Connector SS=Socket/Socket PP=Pin/Pin SP=Socket/Pin PB=Pin/Bare SB=Socket/Bare 9=90 Degrees	Caps DD=No caps CC= Caps both DC=No Cap/Cap CD=Cap/No Cap	Length in Feet
--	---	---	----------------

NOTES:

- 1) CABLE, 4C 20ga Stranded, Tinned
- 2) Black Polyurethane Jacket UV Resistant
- 3) Pot & Mold connector to cable using Black compound
- 4) Call for orientation on all 90 degrees molds
- 5) Tag both ends of cable with model number
- 6) include 15" clear heatshrink at each end. Do not shrink

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS ANGULAR
.XX ± .02 ± 0.5°
.XXX ± .010
DO NOT SCALE DRAWING

THE INFORMATION ON THIS DOCUMENT IS
PROPRIETARY AND IS NOT TO BE REPRODUCED,
DISTRIBUTED OR DISCLOSED EXCEPT AS
SPECIFICALLY AUTHORIZED IN WRITING BY
SERVAGROUP



SERVAgrouP

5830 - 51 STREET S.E.
CALGARY, AB, T2C 4M9, CANADA
PHONE: (403) 269-7847 FAX: (403) 269-7869
WWW.SERVAGROUP.COM

TITLE: SIGNAL CABLE PT0610-6 4C 20ga

DATE: MAR 7 2008 DWG NO: 100

DWG BY: BH CHKD BY: CHK_BY

SCALE: NTS MASS: W.T.

REV: A

SHEET: 1

USER

REVDATE

FNAME