
TM STORY OF THE ST

Enviro™ Single "Compact" Pack-Off

The Elmar Enviro™ Single Hydraulic "Compact" Pack-Off is designed to wipe clean moving cable under pressure.

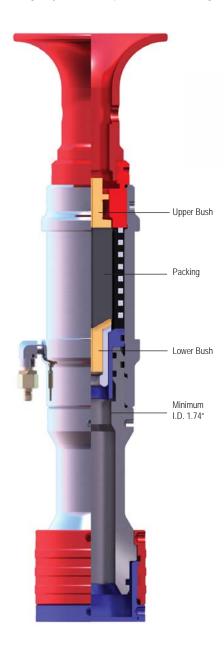

Note: 1. Other quick union sizes are available upon request 2. Wire size to be specified when ordering. 3. Seal Kit does not include line sized parts - order separately.

Dimensions & Weights

(Height) 66 cm, 26 in, (Weight) 34 kg, 75 lbs, Clean I.D. 4.42 cm, 1.74 in

Positioned above the tubing/casing, the Enviro™ Single "Compact" Pack-Off is built around the wire before the wireline tool is lowered into the well.

The Enviro™ Single "Compact" Pack-Off works by squeezing the independent rubber element which is wrapped around the wire. The element seals on the cable outer armour against well pressure, as well as wiping the wire free of fluid. The sealing element will seal on static cable, although the ideal cable to seal on is a seasoned cable.

The Enviro $^{\text{TM}}$ Single "Compact" Pack-Off is designed so that the rubber element in direct contact with the wire is easily replaced.

The EnviroTM Single "Compact" Pack-Off is rated to 5,000 psi working pressure (static wireline) and $\rm H_2S$ service and is available with full material traceability and Third Party Certification.

A 0-3000 psi hand pump and hose is required to operate the Enviro $^{\text{TM}}$ Single "Compact" Pack-Off.

PART NUMBERS				
Working Pressure	Srv.	Quick Union Connection	Seal Kit	
5,000 psi	H ₂ S	4 3/4"-4thd (3.750") Bowen Pin & Collar	L-972872K	
5,000 psi	H ₂ S	5"-4thd (3.500") Otis Pin & Collar	L-973105K	
5,000 psi	H ₂ S	6 5/16"-4thd (4.375") Bowen Pin & Collar	L-981416K	
5,000 psi	H ₂ S	5 1/2"-4x2thd (4.375") Bowen Pin & Collar	L-9701002513K	
5,000 psi	H ₂ S	4 3/4"-4x2thd (3.750") Elmar Pin & Collar	L-981164K	
	Working Pressure 5,000 psi 5,000 psi 5,000 psi 5,000 psi 5,000 psi	Working Pressure Srv. 5,000 psi H ₂ S 5,000 psi H ₂ S 5,000 psi H ₂ S 5,000 psi H ₂ S	Working Pressure Srv. Quick Union Connection 5,000 psi H ₂ S 4 3/4"-4thd (3.750") Bowen Pin & Collar 5,000 psi H ₂ S 5"-4thd (3.500") Otis Pin & Collar 5,000 psi H ₂ S 6 5/16"-4thd (4.375") Bowen Pin & Collar 5,000 psi H ₂ S 5 1/2"-4x2thd (4.375") Bowen Pin & Collar	

SPARE PARTS			
Wire Size	Upper Bush	Packing	Lower Bush
3/16"	L-831250	L-831140	L-831260
7/32"	L-831070	L-831150	L-831080
1/4"	L-830058	L-831150	L-830059
9/32"	L-831009	L-831130	L-831008
5/16"	L-831170	L-831130	L-831190
3/8"	L-831011	L-831005	L-831007
0.390"	L-830046	L-830045	L-830047
7/16"	L-830061	L-830056	L-830062
1/2"	L-831280	L-831270	L-831290
9/16"	L-831160	L-831120	I -831180

PRESSURE TEST ACCESSORIES				
Part Number	Description			
L-979575	Test Stump with 4 3/4"-4thd (3.750") Bowen Box			
L-974823	Test Cap with 5"-4thd (3.500") Otis Box			
L-978123	Test Stump with 5 3/4"-4thd (4.000") Otis Box			
L-978826	Test Stump with 6 5/16"-4thd (4.375") Bowen Box			
L-971597	Test Stump with 4 3/4"-4x2thd (3.750") Elmar Box			
L-975102	Test Plug (dummy packing element)			
L-690730	Hand Pump			
L-691080	Hose Assembly x 25ft long			
L-690760	Hose Assembly x 50ft long			
L-975800	Test Cap with 5 1/2"-4x2thd (4.375") Bowen Box			

Note: Additional sizes available on request.



